tapflo

CTP PLASTIC CENTRIFUGAL PUMPS

2020|



>> All about your flow ™

www.tapflo.com

>> All about your flow

We began our journey 40 years ago in Kungälv, a small town on the Swedish west coast, as a family company with an ambition to one day become a global player on the pump market.

Since 1980, we have taken pride in delivering a wealth of knowledge and passion for pumps to the industry, whilst supplying a wide range of premium products for various industrial applications.

Over the years, the company has developed into a global Tapflo Group with branches and distributors present in nearly every region of the world.

One thing did not change - we are still a family company.

Our solutions are designed and manufactured in Europe and distributed globally to offer the best service and flow solutions to our customers for a variety of applications.

Our values, Commitment, Quality and Simplicity are reflected both in our product and business approach.



For fast and flexible service and high-quality products readily available worldwide, choose Tapflo.

Quality commitment

At Tapflo we are simply committed to quality. As a result, our production standards, as well as products quality, comply with various globally recognised certification and quality control standards. The Tapflo manufacturing process is certified according to ISO 9001:2015, confirming that our processes are appropriate, effective, customer-focused and continuously improved.















Tapflo values

Our culture is concluded in Our values

Commitment

We are different from our competitors because of our willingness to exceed the customers' expectations, move fast and be flexible. Our culture is based on the spirit of togetherness, enthusiasm and integrity. We come from all over the world but we share the same values and we respect each other. We are committed.

Quality

We understand that the quality in our work is never better than the weakest link, that's why we focus on every small detail. We share a common passion for continuously finding more efficient and effective ways to provide value to our customers. As a manufacturer we have control of the complete process both in terms of our products and the way we operate internally. That is why we manufacture the highest quality pumps in our segment.

Simplicity

We have a saying, "Simple is art" which means we try to find smooth and uncomplicated solutions in everything. By keeping it simple we can focus on the essential, like designing uncomplicated pumps with few components. For us it is a key to success; strive to simplify what is complex.

CTP Plastic Pumps

The CTP pumps are semi-open impeller single stage centrifugal pumps. Since there are no metal parts on the liquid side, the pumps are ideal for chemical transfer and circulation duties. CTP is a compact and reliable mechanically sealed centrifugal pump made in PP and PVDF. It is the right solution for liquids containing solid particles.



Wide range of applications

Transfer of chemicals

Transfer of various chemicals from storage tanks to smaller containers.

Surface treatment

Transfer, filtering and circulation of surface treatment baths.

Food and beverage

Pumping of CIP detergent used for cleaning of pipes and other food process equipment.

Water treatment

Fluid transfer in water treatment installations.

Chemical manufacture

Pumping of chemicals in industrial detergent equipment.

Demineralization

Demi-water circulation and transfer in many industrial applications.

Photo processing

Transfer of photo development chemicals and inclusion in processing machines.

Liquid crystal manufacture

Pumping of concentrated acids and alkalis.

Features & Benefits



Mechanical seal

spring on dry side and thereby not exposed to the pumped liquid; different seal face materials available to suit various applications



Semi-open impeller

Allows pumping liquids with particles up to Ø 3 mm



PP & PVDF wetted materials

Can handle highly corrosive liquids



Few parts

Low maintenance, easy to handle



No metal parts in contact with the liquid



Optional flange and hose connections

Robust and compact design


Mechanical seal

The spring is located on the dry side of the pump therefore all metallic parts are protected against contact with the liquid. This means no elastic bellow is required.



PP & PVDF wetted materials

Can handle highly corrosive liquids also containing solids and metallic particles. Pumps can handle high temperature liquids alkali and acids. The version in PP-**GF** (glass fibre reinforced polypropylene) provides great mechanical strength and allows liquid temperatures up to 70°C. The PVDF (polyvinylidene fluoride) version has superior chemical resistance and allows temperatures up to 90°C.

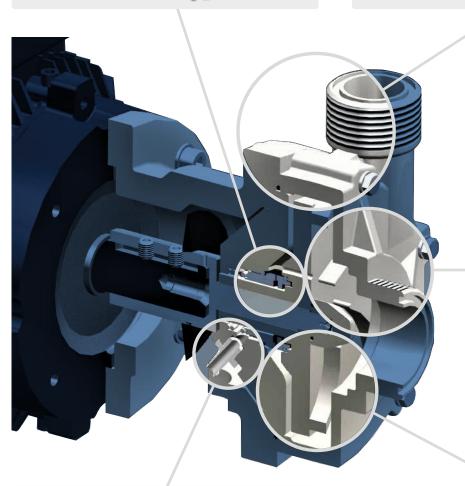

Chemically resistant pumps

The wetted components are non-metallic injection moulded thermoplastics enabling excellent corrosion resistance.

The **shaft** is protected by means of a plastic sleeve and nut compatible with the pump housing material.

Safety drain

The special revision hole in the back casing provides a drainage from the mechanical seal in case any leakage occurs. This prevents the motor and shaft from getting into contact with the pumped liquid. The PVDF barb connector allows plug a hose and route the liquid out of the pump.


Semi open impeller

Allows pumping liquids with particles up to Ø 3 mm and 10% in concentration. A semi open impeller also improves the transfer of liquids with higher viscosity.




Performance curves

The performance curves are based on water. (T=20 °C, p=1000 kg/m, n=2900 rpm)

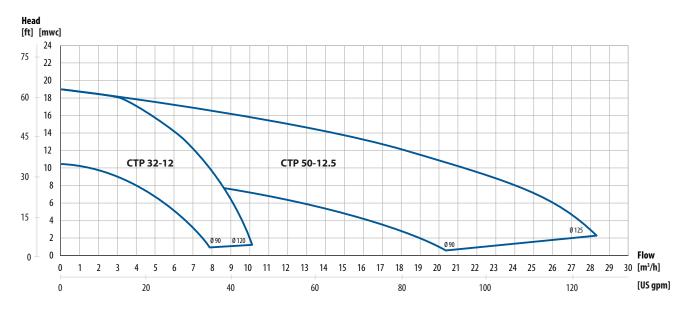

Technical data

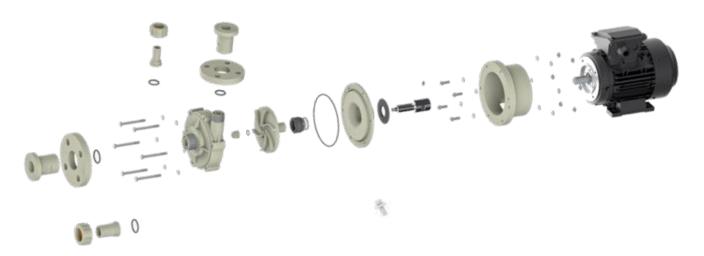


Materials and limits


Casing	PP-GF (30%) or PVDF			
Back casing	PP or PVDF			
Impeller	PP or PVDF			
Lantern (not wetted)	PP			
Mechanical seal	Rotating part: SiC or Graphite, Stationary part: SiC, Spring: AISI 316			
O-rings	EPDM, FFKM, FEP/FKM			
Shaft	AISI 316L stainless steel (standard) or Hastelloy® C-276			
Motor	Standard IEC, 3x400 VAC, 2900 rpm, IP55, B34 frame			
Pressure rating	PP pumps: PN6 at 20°C; PN2 at 70°C; PVDF pumps: PN6 at 20°C; PN2 at 90°C			
Temperature	PP pumps: 0°C - 70°C; PVDF pumps: 0°C - 90°C			
Viscosity	max ~200 cSt			

¹Hastelloy® C is a registered trademark of Haynes International, Inc.

Dimonsions

Dimer	rsions									
Dim	Pump model									
Dilli	CTF	32	CTP50							
Motor										
Power	0,75 kW	1,1 kW	3 kW	4 kW						
Size	80		100	112						
Α	105		110							
В	56		54							
C	98		125							
øΕ	15		30.8							
øF	23		42							
G	G 1¼"		G 2"							
Н	G 1"		G 1½"							
L	30)4	382	389						
М	50	0	63	70						
N	10	00	140							
P	1:	5	12							
Q	8	0	100	112						
R	58	58.5		52						
S	12	.5	160	190						
Т	16	50	184 219							
U	10		12							
	Flange	e connectio	n DIN (optiona	I)						
Inlet	DN32		DN50							
Outlet	DN		DN40							
	Flange connection ANSI (optional)									
Inlet	11/2		2"							
Outlet	1		1½"							
Hose connection (optional)										
Inlet	OD=		OD=50							
Outlet	OD=		OD=40							
N	Impeller									
Nominal	ø1:	20	ø125							

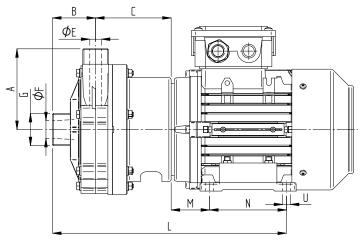



CTP Pump code						
					V.	
	СТР	32	- 12.5	Р	- 1SSV ·	- 07

I. CTP = Tapflo Mechanically Sealed Plastic Centrifugal pump

Dimensions in mm (where other is not indicated)

II. Pump size:

diameter

32 = Suction 1 ¼"; Discharge 1"

50 = Suction 2"; Discharge 11/2"

III. Impeller size [mm]:

12 = 120 mm

12.5 = 125 mm

IV. Material: P = PP (Polipropylene)

K = **PVDF** (**Polyvinylidene fluoride**)

V. Pump options:

blank* = Carbon/SiC/EPDM for PP blank* = SiC/SiC/FKM for PVDF

CSE = Carbon/SiC/EPDM CSV = Carbon/SiC/FKM

SSV = SiC/SiC/FKM SSF = SiC/SiC/FEP/FKM

P

blank* = EPDM for PP; FKM for PVDF E = EPDM

V = FKM

F = FEP/FKM

blank* = AISI 316L

H = Hastelloy C-276¹

blank* = BSP thread

A = ANSI flange

F = DIN flange H = Hose connection

 $I = Optional\ impeller\ diameter\ [mm]$

VI. Motor power / IEC mechanical size:

07 = 0,75 kW (mechanical size 80)

11 = 1,1 kW (mechanical size 80) 30 = 3,0 kW (mechanical size 100)

40 = 4,0 kW (mechanical size 112)

VII. Motor options

P = 1-phase 220/230 VAC

V... = Different voltage

 $T = PTC \ motor \ protection$

F60 = 60 Hz motor

¹Hastelloy® C is a registered trademark of Haynes International, Inc.

Ask us for complete pump code with all available options and executions. Changes reserved without notice.



Product range

Diaphragm pumps & accessories































Centrifugal pumps, filter units & accessories





centrifugal pumps













TAPFLO AB









Sweden

Filaregatan 4 | S-442 34 Kungälv

Tel: +46 303 63390 Fax: +46 303 19916

E-mail addresses:

Commercial questions: sales@tapflo.com

Orders: order@tapflo.com

Tech support: support@tapflo.com

Tapflo products and services are available in 75 countries on 6 continents.

Tapflo is represented worldwide by own Tapflo Group Companies and carefully selected distributors assuring highest Tapflo service quality for our customers' convenience.

AUSTRALIA | AUSTRIA | AZERBAIJAN | BAHRAIN | BELARUS | BELGIUM | BOSNIA | BRAZIL | BULGARIA | CANADA | CHILE | CHINA | COLOMBIA | CROATIA | CZECH REPUBLIC | DENMARK | ECUADOR | EGYPT | ESTONIA | FINLAND | FRANCE | GREECE | GEORGIA | GERMANY | HONG-KONG | HUNGARY | iceland | India | Indonesia | Iran | Ireland | Israel | Italy | Japan | Jordan | Kazakhstan | Kuwait | Latvia | Libya | Lithuania | Macedonia | MALAYSIA | MEXICO | MONTENEGRO | MOROCCO | NETHERLANDS | NEW ZEALAND | NORWAY | POLAND | PORTUGAL | PHILIPPINES | QATAR | ROMANIA | RUSSIA | SAUDI ARABIA | SERBIA | SINGAPORE | SLOVAKIA | SLOVENIA | SOUTH AFRICA | SOUTH KOREA | SPAIN | SUDAN | SWEDEN | Switzerland | Syria | Taiwan | Thailand | Turkey | Ukraine | United Arab Emirates | United Kingdom | USA | Uzbekistan | Vietnam

Tapflo Group Companies

Australia

Tapflo Oceania (Pty) Tel: +61 1800 303 633 sales@tapflo.com.au

Austria

Tanflo Austria Tel: +43 732 27292910 sales@tapflo.at

Baltic States

Tapflo Latvia Tel: +371 67472205 sales@tapflo.lv

Belarus

Tanflo Belarus Tel: +375 17 3934609 sales@tapflo.by

Belgium

Tapflo Benelux B.V. Tel: +31 (0)85 00 743 00 info@tapflo.nl

Bulgaria

Tapflo EOOD Tel: +359 (0)2 974 18 54 office@tapflo.bg

Tanflo Canada Tel: +1 514 813 5754 canada@tapflo.com

Croatia

Tapflo GmbH Tel: +385 91 4884 666 sales@tapflo.hr

Czech Republic

Tapflo s.r.o. Tel: +420 513 033 924 tapflo@tapflo.cz

China

Tapflo (Wuxi) Tel: +86 510 8241 7072 sales@tapflo.cn

Denmark

Tanflo Danmark Tel: +45 36 454600 info@tanflo.dk

France

Tanflo France Tel: +33 1 34 78 82 40 info@tapflo.fr

Tapflo Fluid Handling India Pvt Ltd Tel: +91 20 65000215 ac@tapflo.in

Ireland

Tapflo Ireland Ltd Tel: +353 1 2011911 info@tapflo.ie

Italy

Tapflo Italia Tel: +39 0362307698 info@tapfloitalia.com

Japan

Tapflo Japan K.K. Tel: +81-3-6240-3510 tapflojp@tapflo.co.jp

Kazakhstan

Tanflo Kazakstan Tel: +7 727 3278347 sales@tanflo kz

Netherlands

Tanflo Benelux B.V. Tel: +31 (0)85 00 743 00 info@tapflo.nl

Poland

Tapflo Sp. z o.o. Tel: +48 58 530 42 12 info@tapflo.pl

Romania

S.C. Tapflo Rom. S.r.l. Tel: +40 21 3451255 sales@tapflo.ro

Russia

Tapflo Company Tel: +7 495 232 18 28 sales@tapflo.com.ru

Serbia

Tapflo d.o.o. Tel: +381 21 44 58 08 sales@tapflo.rs

Slovakia

Tanflo s.r.o. Tel: +421 911 137 883 tapflo@tapflo.sk

Slovenia

Tapflo GmbH Tel: +386 68 613 474 sales@tapflo.hr

Spain

Tanflo Iberica Tel: +34 91 8093182 avives@tapfloiberica.es

South Africa

Tapflo (Pty) Ltd Tel: +27 31 701 5255 sales@tapflo.co.za

Turkey

Tapflo Makina Ltd Tel: +90 216 467 33 11 sales@tapflo.com.tr

Ukraine

TOB Tapflo Tel: +380 44 222 68 44 sales@tapflo.ua

Uzbekistan

Tanflo Uzbekistan Tel: +998 712370940 sales@tapflo.uz

United Kingdom

Tapflo (UK) Ltd Tel: +44 2380 252325 sales@tapflopumps.co.uk

www.tapflo.com